




FLUOROCARBON

**High Performance Engineering
Plastics and Stock Shapes**

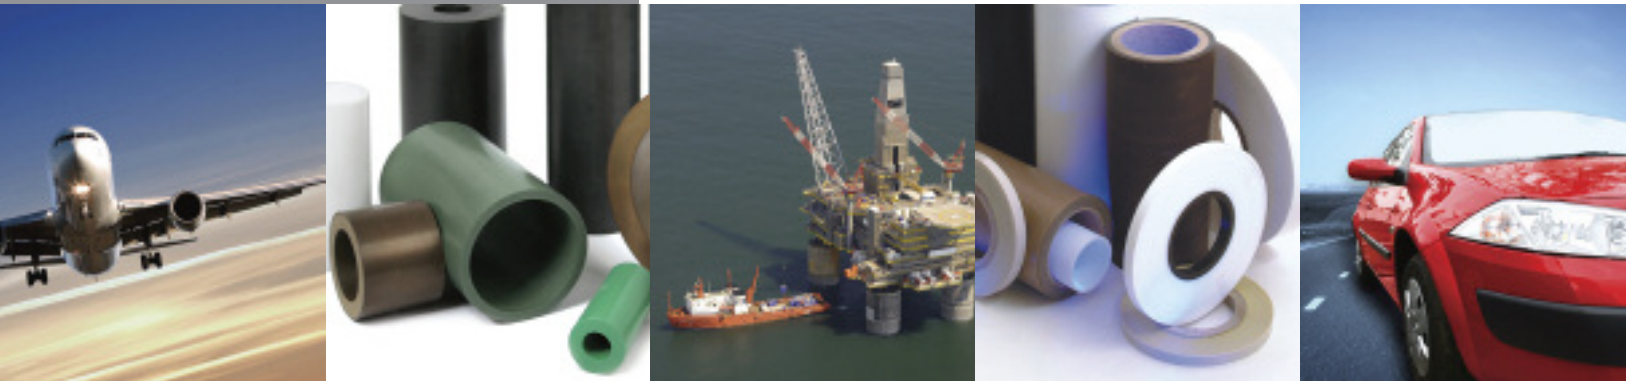

World leading innovations in
fluoropolymer processing

Typical Properties Table - Fluoropolymers and Engineering Plastics

Fluorinoid® grade	Material	General			Mechanical				Electrical		Thermal		
		Density	Flammability	Water absorption	Tensile strength at 23°C	Elongation at break at 23°C	Rockwell hardness	Shore hardness D	Coefficient of friction	Volume resistivity	Dielectric strength	Coefficient of linear expansion	Maximum continuous operating temperature
		g/cm³		%	N/mm²	%				Ωcm	KV/mm	1/K 10 ⁻⁶	°C
FL100	PTFE Virgin	2.14-2.19	NC	0.00	20-40	200-450		55-65	0.05-0.2	10 ¹⁸	40-80	12-16	260
FL105	PTFE 25% Glass	2.24	NC		12-20	200-300		60-70	0.07-0.2			11-15	260
FL115	PTFE 25% Carbon	2.10	NC		11-16	70-150		60-70	0.1-0.2			8-11	260
FL141	PTFE 60% Bronze	3.90	NC		10-14	80-160		65-75	0.07-0.2			9-14	260
FL305	PFA	2.12-2.17	NC	<0.03	25-32	300		60-65	0.2-0.3	>10 ¹⁸	50-80	12-16	260
FL304	FEP	2.12-2.17	NC	<0.01	19-25	250-350		55-60	0.2-0.3	>10 ¹⁶	50-80	8-14	200
FL300	ETFE	1.70-1.75	SE	<0.1	36-48	200-500	R45-55	70-75	0.3-0.5	>10 ¹⁶	60-90	5-9	150-180*
FL308	PVDF	1.75-1.78	SE	0.05	30-50	20-250	R100-115	75-85	0.2-0.5	10 ¹⁴	40-80	8-12	150-170*
FL346	ECTFE Halar®	1.67-1.70	SE	<0.1	41-54	200-300	R85-95	70-80	0.2	10 ¹⁵	50	4-7	150-180*
FL325	PCTFE	2.10-2.16	NC	<0.01	31-42	80-250	R103-118	70-90	0.2-0.3	>10 ¹⁷	50-70	4-8	150-180*
FL347	VespeI® SP1	1.35-1.45	SE	1-1.3	45-86	2-8	E45-60		0.2-0.35	10 ¹⁴ -10 ¹⁵		4-6	300
FL348	PPS	1.34	NC	0.07	70	3	M93		0.24-0.3	10 ¹⁶	20	7	200
FL341	PES	1.37	NC	2.2	85	30	M88		0.27-0.32	10 ¹⁶	16	3-6	180
FL350	PEEK	1.30	NC	0.5	105	110	M99		0.2-0.25	10 ¹⁶	19	7	260
FL340	UHMPE	0.94	C		20-40	300-500		60-70	0.15-0.3	10 ¹⁷	90	20	80
FL349	NYLON 6	1.10-1.15	C	9-10	40-80	80-100	M80		0.22-0.26	10 ¹³	35	8	90
FL328	NYLON 66	1.10-1.15	C	7.5-9.5	40-85	60	M80		0.2-0.28	10 ¹⁵	30	7-10	90
FL333	NYLON 12	1.01-1.05	C	1.5-2	40-60	150-350	M82			10 ¹⁵	35	8-15	70
FL339	HDPE	0.945-0.963	C		19-35	300-500	M75-80	62-69	0.3-0.35	10 ¹⁷	60-90	15-20	80
FL321	ACETAL	1.40-1.42	C	0.8	70	30-80	M80		0.14-0.35	10 ¹⁵	20	11	85-145*


NC - Non-combustible SE - Self-extinguishing C - Combustible

Halar® registered trademark of Solvay
VespeI® registered trademark of DuPont

The above physical properties are typical values for comparative purposes only and do not represent a product specification. Properties will vary depending on the source of raw material, method of processing, physical form of the product or direction of measurement etc. The above properties must not be used for design purposes. For the correct properties in a specific application please refer to our Technical Department.

*Upper temperature dependent on application, please call for assistance.

With over 40 years of experience in the manufacture of PTFE, melt fluoropolymers and high performance polymers, our range of engineering plastics and stock shapes is one of the most extensive in the world.

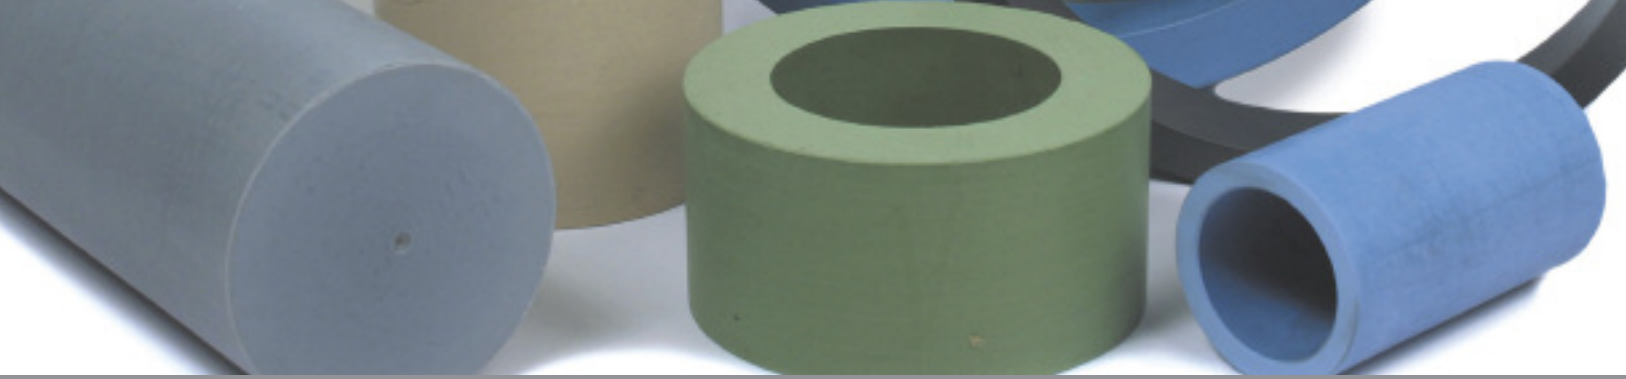

PTFE Rod & Tube

Extruded rod & tube, moulded rod & tube and PTFE sheet & tape are manufactured to the highest quality and using our Fluorinoid® materials range, products are available in a wide variety of filled grades.

We provide a variety of products for applications in many industries, including:

- Aerospace
- Electronics
- Oil & Gas
- Medical & Pharmaceutical
- Transportation
- Chemical

Specialising in high quality PTFE compression moulded and extruded rod and tube, we offer a wide range of diameters and lengths suitable for today's modern machining.

PTFE Extrusion

- Rod: 6mm - 140mm diameter up to 4000mm length
- Tube: 15mm – 150mm diameter up to 4000mm length
- PTFE thin wall tubing in a variety of sizes and colours

PTFE Compression Moulding

To produce rod lengths to 2000mm we use a unique process for low stress material for high precision machining within a narrow tolerance band.

- Rod: 3mm – 50mm diameter up to 2000mm length
- Rod: up to 1500mm diameter at various lengths
- Tube: 20mm – 1500mm OD at various lengths

Precision Grinding

We offer a precision grinding service to ensure close tolerance rods for modern machining. We ensure a high level of surface finish with a constant tolerance from batch to batch.



High Performance & Melt Fluoropolymers

Exploiting our specialised processing equipment and wide tooling range, we are able to convert high performance and melt fluoropolymer materials into semi-finished shapes for post machining or low to high volumes of moulded components.

Materials include:

PEEK, PCTFE, PFA, FEP and PPS.

Our range of products includes extruded and hot compression moulded rod, heavy tubing, sheet and custom shapes and can be supplied plain or chemically etched ready for bonding.

Melt Extrusion

- Rod: 3mm – 100mm diameter up to 3000mm length
- Tube - Heavy wall: 20mm ID to 100mm OD in a variety of lengths
- Sheet: up to 180mm width x 1000mm length x 50mm thickness

Hot Compression Moulding

- Rod: 28mm – 200mm diameter up to 200mm length
- Tube: 25mm – 100mm ID x 50mm – 150mm OD up to 200mm length
10mm – 250mm ID x 125mm – 300mm OD up to 150mm length
275mm – 500mm ID x 350mm – 550mm OD up to 100mm length
525mm – 850mm ID x 600mm – 940mm OD up to 60mm length
- Sheet: 300mm length x 300mm width up to 40mm thickness

Special Products

- Amorphous clear PCTFE sheet for chemically resistant sight-glass covers
- Custom shaped moulded billets and sheet using low cost tooling
- Lining of customer steelwork
- Precision grinding service for close tolerance
- Injection moulded PEEK billets

PTFE Sheet & Tape

As one of the largest UK manufacturers of semi-finished virgin and filled PTFE sheet and tape we ensure each product is tailored to meet customer requirements.

Our extensive range of PTFE sheets and tapes includes dimpled, moulded, skived and self-adhesive; available in a variety of thicknesses. A fast turnaround service is available on non stock items and same day dispatch on all standard stock items.

Using our in-house services all items can be supplied chemically etched on one or both sides using the Fluoroetch® HD etching process.

Skived Tape

- 0.1mm - 6mm thick, max width 1220mm
- Available in continuous rolls, cut sheets or slit to a specific width
- Filled grades can be manufactured up to 1000mm wide

Moulded Sheets

- 8mm - 100mm thick to a maximum size of 1200mm²
- Sheets may be supplied as cut pieces or machined into individual shapes

Self-Adhesive Backed Tape (Fluoroetch® SA)

- Four standard thicknesses; 0.13mm, 0.25mm, 0.40mm and 0.50mm
- Available as continuous rolls and slit to specific widths
- Food approval (FDA & ISO) used for lining, hoppers and chutes

Dimpled Sheets

- 3.0mm, 4.5mm and 5.0mm thick up to 1220mm²
- Bridge and pot bearings: 4.5mm or 5.0mm thick; supplied as sheet or machined to size
- Available in filled grades of PTFE
- Dimpled sheets either to BS 5400 or EN1337-2

Fluoropack® PTFE/Cork Laminate

- Sheets available 1200mm x 600mm by 2.5mm thick - for blister pack tools

PTFE Coated Glass Cloth

- Available as 1000mm wide rolls or slit to customer requirements
- Ideal for heat wrapped packaging

Etching & Bonding

PTFE is well-known for being a non-stick material; therefore, to enable bonding to other substrates, surface modification in the form of chemical etching is required.


Our Fluoroetch® HD sodium / ammonia process is the most effective etching medium available. We offer a full in-house service of chemical etching and bonding of fluoropolymers, including PTFE, PFA, ECTFE, PCTFE, FEP and TFM.


Etching

- Up to 1.2m width on one or both sides
- Etchant is specifically prepared for each batch run to ensure ultimate bond strength
- Etched sheet can be factory bonded for the manufacture of expansion bearings, slide bearings and skidways
- Etching of free-issue materials in sheet form or finished components

Bonding

- Dedicated hot and cure cold bonding service
- Sheet sizes up to 3m x 1.5m can be bonded at any one time
- Lengths up to 8m have been bonded
- Bonding of materials include: PTFE, rubber, steel, cork and wood
- Adhesives available include epoxy, contact and isocyanates



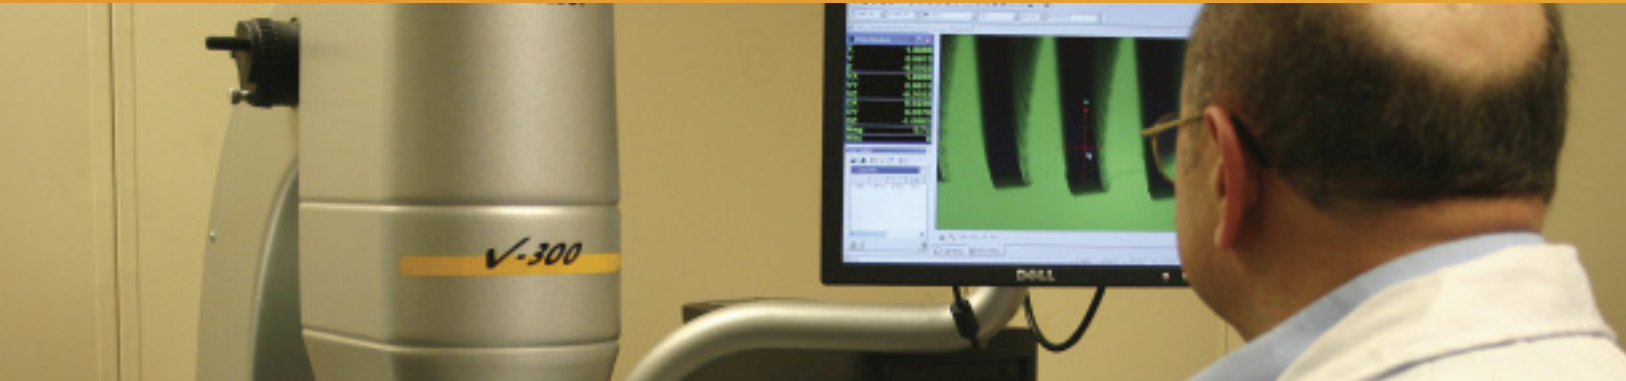

Fluorinoid® Materials

Quality and Testing Facilities

Our company Fluorinoid® register, based on PTFE and thermoplastic technologies, includes over 400 materials that offer exceptional characteristics enabling them to operate in demanding environmental conditions at temperatures to over 300°C.

Materials include:

PTFE, PEEK, PPS, PFA, PVDF, PPS, ETFE and PCTFE along with a variety of fillers, including glass, carbon, graphite, bronze, ekonol and aluminium.

Service

- Product design and advice on material selection to meet specific applications
- Customer specific blends including colour pigments to provide exclusivity
- Formulation and in-house blending of special material compounds in a clean and controlled environment
- Testing of materials and finished products to a wide range of European, US and International standards
- Prototyping available
- Materials conditioned and stress-relieved to ensure optimum quality when machining to tight tolerances

Exceptional Characteristics

- High chemical resistance
- Low co-efficient of friction
- Exceptional dielectric properties
- Thermal insulation
- Good wear resistance

We ensure the highest standards of finished product by retaining complete control of the manufacturing process, whilst converting compounds into semi-finished products.

Compounds can be moulded or extruded to produce stock shapes or machined into components to suit individual specifications offering high quality, end-to-end service that is second to none.

Using our modern, qualified laboratory, we offer full traceability on all products and materials and ensure the highest quality finish.

Our quality system is to ISO9001:2008, with day-to-day testing and analysis to ASTM, DIN and BSI standards.

Testing includes, but is not limited to: tensile, elongation, density, hardness zero, strength time and peel testing.



The Hertford site conforms to Green Dragon Level 2 Environmental Standard



Our products are tested to ISO Standards

For more information on our semi-finished products or for advice on your specific requirements please contact our design and technical engineers today

**For Melt Fluoropolymers,
PTFE Rod & Tube, and
Etching & Bonding - contact:**

Hertford Head Office

Fluorocarbon Company Ltd
Caxton Hill
Hertford
Herts
SG13 7NH
United Kingdom

Tel: +44 (0)1992 526800
Fax: +44 (0)1992 584697

**For PTFE Sheet & Tape and
Etching - contact:**

Manchester Office

Fluorocarbon Company Ltd
Northbank Industrial Park
Excalibur Way
Manchester
M44 5DL
United Kingdom

Tel: +44 (0)161 777 6300
Fax: +44 (0)161 776 2503/7

Other contacts

UK & Export Sales & Manufacturing

Hertford Head Office

Fluorocarbon Company Ltd
Caxton Hill
Hertford
Herts
SG13 7NH
United Kingdom

Tel: +44 (0)1992 526800
Fax: +44 (0)1992 584697

Manchester Office

Fluorocarbon Company Ltd
Northbank Industrial Park
Excalibur Way
Irlam
Manchester
M44 5DL
United Kingdom

Tel: +44 (0)161 777 6300
Fax: +44 (0)161 776 2503/7

Manufacturing

Nottingham Office

FBS Prestige
Unit B
Lilac Grove
Beeston
Nottingham
NG9 1PF
United Kingdom

Tel: +44 (0)115 943 1111
Fax: +44 (0)115 943 1177

Sheffield Office

FBS Prestige
Birley Vale Avenue
Sheffield
S12 2AX
United Kingdom

Tel: +44 (0)114 253 0353
Fax: +44 (0)114 253 0355

International

European Sales Office

Fluorocarbon Company Ltd
Van Doesburg - ERF 50
3315 RB Dordrecht
The Netherlands

Tel: +31 78 654 0851
Fax: +31 78 654 0852

European Manufacturing Office

SC Fluorocarbon SRL
Strada Dunarii Nr. 277, Corp C10
Alexandria
Judetul Teleorman
Romania

Tel: +40 247 314245/421075
Fax: +40 247 421076

USA Sales Office

Fluorocarbon Company Ltd
6000 Fairview Road
Suite 1200
Charlotte
NC 28210
USA

Tel: +1 704 552 3612
Fax: +1 704 552 3613

The following trademarks are the intellectual property of The Fluorocarbon Group

Fluoroetch® HD
Fluoroetch® SA
Fluoropack®
Fluorinoid®

The Fluorocarbon trademark is the intellectual property of The Fluorocarbon Group

FCL-SB-006

Web: www.fluorocarbon.co.uk
Email: info@fluorocarbon.co.uk